



with **BLACK TANK TECHNOLOGY**

Architectural & Entertainment Lighting for Engaging Environments

Knight Lighting Solutions

143 Route 59, Building 3

Hillburn, NY 10931

[www.knightlightingsolutions.com](http://www.knightlightingsolutions.com)




# DMX Knight Wash Fixtures Quick Start Guide


Covering White Knight (3000K), Daylight Knight (5600K), UV Knight (365nm),  
Rainbow Knight (RGBA & RGBW), KLS Single DMS

Revision 12/29/2022

## Get To Know Your Fixture Head

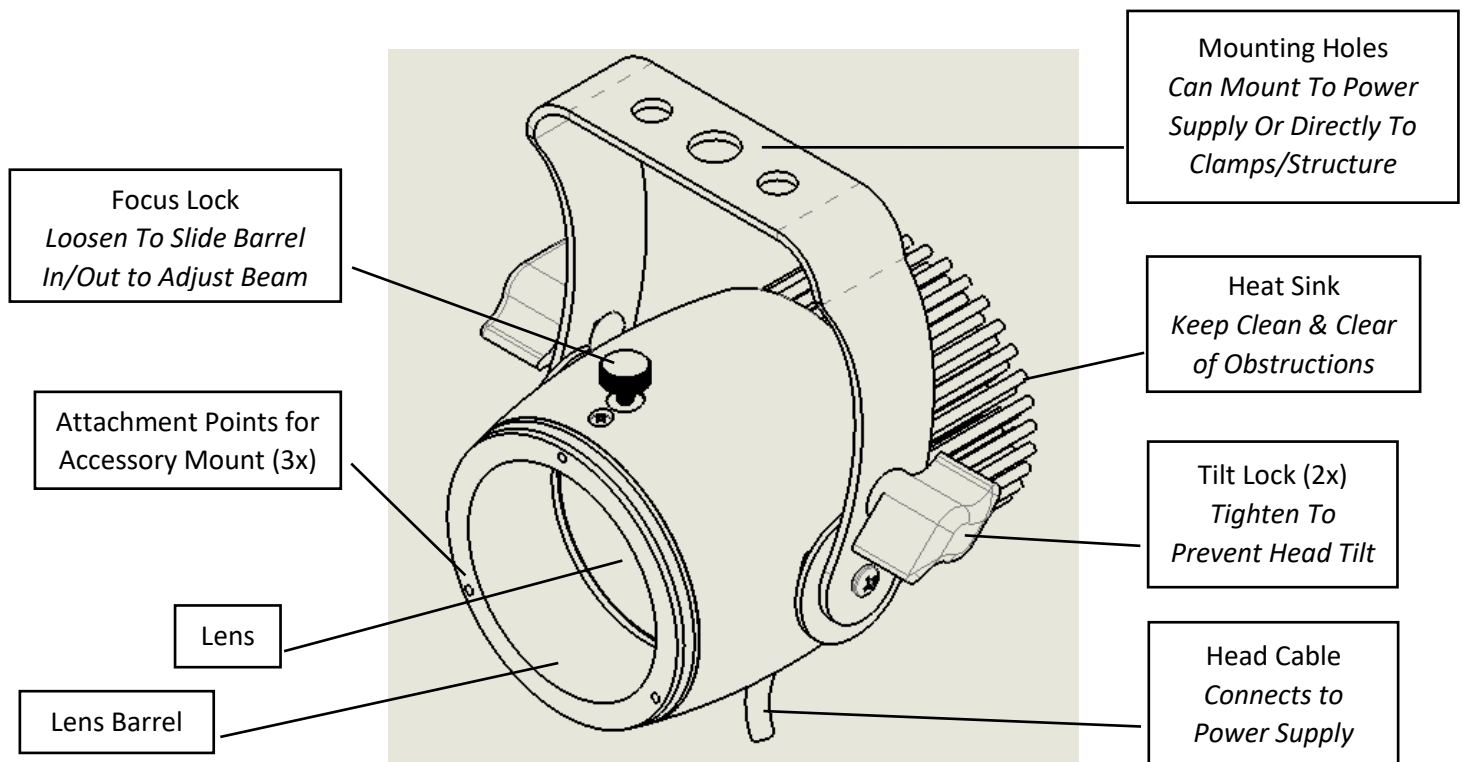

## Get To Know Your Power Supply

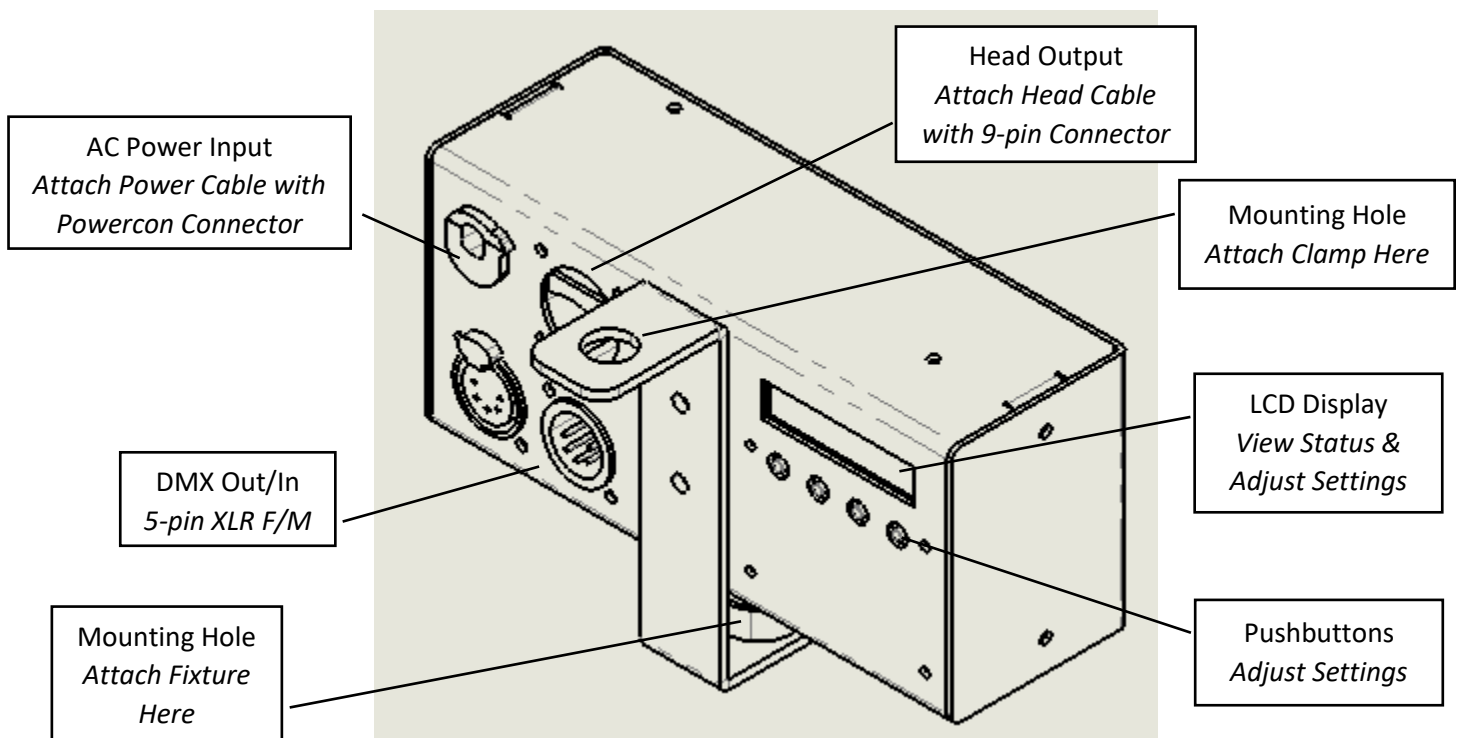

## General Warnings



### WARNING!

Failure to attend to these items could lead to injury or death.

1. ALWAYS use a safety cable in addition to the primary attachment method when rigging the fixture.
2. Before use, ALWAYS make sure all screws and safety points are secured.
3. ALWAYS make sure the light is unplugged before performing any service to the unit.
4. ALWAYS keep this product out of reach of children and untrained persons.
5. ALWAYS adhere to safety instructions and warnings, including any and all instructions set forth in this or any other product-related documentation.
6. Use ONLY in environments that the fixture has been rated for.
7. The UV Knight has a peak output of 365nm, which is in the Ultraviolet A (UVA) range. Ultraviolet (UV) light is harmful to the skin and eyes. Since it is minimally visible to the naked eye, this hazard is more significant. DO NOT stare directly into the lens when testing or operating the unit. Avoid long-term exposure to the UV light at close range unless appropriate precautions are taken to block the harmful wavelengths.

## General Precautions



### CAUTION!

Failure to attend to these items could lead to damage to the product.

1. To allow for proper cooling of the head, airflow must not be restricted around the heat sink at the rear of the fixture.
2. To allow for proper cooling of the power supply, the vent openings on the back of the power supply must not be blocked. The maximum operating environment for the power supply is 45°C.

## Settings

*Note: DMX Address and all other settings are non-volatile and will be saved when power is disconnected.*

### DMX Address (All Fixtures)

Starting DMX address to which the fixture will respond (see RDM/DMX Personality section for info on address usage).

### Universe 1/2 (All Fixtures)

Determines whether fixture responds to DMX on pins 2/3 (Universe 1) or 4/5 (Universe 2).

### Dimming Curve (RGBA & RGBW)

**Standard Mode** – Each output color reaches maximum power of total maximum fixture power divided by 4. For example, a 40W fixture outputting purple (R+B) would have a maximum output of 20W, 10W for each color. In RDM Discovery, fixture will flash white if this mode is active.

**Ludicrous Mode** – Any combination of 1-4 colors can reach total maximum fixture power. For example, a 40W fixture outputting purple (R+B) would have a maximum output of 40W, 20W for each color. In RDM Discovery, fixture will flash green if this mode is active.

### Dimming Curve (UV)

**Standard Mode** – Maximum LED drive current is 500mA.

**Ludicrous Mode** – Maximum LED drive current is 700mA.

### Filament Fade (All Fixtures)

This will smooth out the dimming curve of the incoming DMX to better match the slower dimming response of a traditional incandescent fixture (instead of the nearly instantaneous one possible with LEDs). Settings are 0 OFF, 1 MIN(imum), 2 MED(ium), 4 MAX(imum).

### Operating Mode (All Fixtures)

| <b>Mode</b>                                                                                                                                                                                                                                                                                      | <b>White Knight<br/>Daylight Knight</b><br> | <b>UV Knight</b><br> | <b>Rainbow Knight<br/>(RGBA &amp; RGBW)</b><br> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| DMX – Light output controlled by externally provided DMX signal, behaves as per Personality.<br><br><i>If no DMX signal is present on power up, then White and RGBx heads will shine at low level. If DMX signal is lost during operation, then fixture will maintain last look.</i>             | Yes                                                                                                                            | Yes                                                                                                       | Yes                                                                                                                                  |
| Color Wash – Light output is continuous color wash with speed set by menu. Broadcasts DMX on output to match or with offset for each fixture down the line to be delayed in change. Downstream fixtures should be set to DMX mode with 4ch control and assigned addresses of 5, 9, 13, 17, etc.. | No                                                                                                                             | No                                                                                                        | Yes                                                                                                                                  |
| Manual – Light output controlled by values set in menu on unit. Broadcasts DMX on output as per manual settings.                                                                                                                                                                                 | Yes                                                                                                                            | Yes                                                                                                       | Yes                                                                                                                                  |


## RDM/DMX Personality

In DMX mode, the unit is controlled by the data it receives on the 5-pin XLR connectors located on the power supply. The number of DMX channels required to control the fixture is dependent on the Personality in use.


| <b>RDM/DMX Personalities</b>                                                                                                                                             | <b>White Knight<br/>Daylight Knight</b><br> | <b>UV Knight</b><br> | <b>Rainbow Knight<br/>(RGBA &amp; RGBW)</b><br>                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>#1</b><br><b>8-bit Legacy</b>                                                                                                                                         | <b>1ch</b><br>1 – Intensity                                                                                                  | <b>1ch</b><br>1 – Intensity                                                                           | <b>4ch</b><br>Intensity<br>1 – Red<br>2 – Green<br>3 – Blue<br>4 – Amber/White                                                                                                |
| <b>#2</b><br><b>16-bit Legacy</b>                                                                                                                                        | <b>2ch</b><br>Intensity<br>1 – Coarse<br>2 – Fine                                                                            | <b>2ch</b><br>Intensity<br>1 – Coarse<br>2 – Fine                                                     | <b>8ch</b><br>Intensity<br>1 – Red Coarse<br>2 – Red Fine<br>3 – Green Coarse<br>4 – Green Fine<br>5 – Blue Coarse<br>6 – Blue Fine<br>7 – Amb/Wht Coarse<br>8 – Amb/Wht Fine |
| <b>#3</b><br><b>8bit +MASTER</b>                                                                                                                                         | <b>2ch</b><br>1 – Intensity<br>2 – Master Dimmer                                                                             | <b>2ch</b><br>1 – Intensity<br>2 – Master Dimmer                                                      | <b>5ch</b><br>1 – Red Intensity<br>2 – Green Intensity<br>3 – Blue Intensity<br>4 – Amb/Wht Intensity<br>5 – Master Dimmer                                                    |
| <b>8bit + CCT_2CH</b>                                                                                                                                                    | n/a                                                                                                                          | n/a                                                                                                   | <b>#4</b><br><b>2ch</b><br>1 – CCT (2200-10,000K)<br>2 – Master Dimmer                                                                                                        |
| <b>#5</b><br><b>8bit 1MASTER</b><br><i>Locks In Current<br/>Color/Brightness When<br/>Changed to This<br/>Personality, Then<br/>Channel Adjusts Relative<br/>to That</i> | <b>1ch</b><br>1 – Master Dimmer                                                                                              | <b>1ch</b><br>1 – Master Dimmer                                                                       | <b>1ch</b><br>1 – Master Dimmer                                                                                                                                               |

| <b>RDM/DMX Personalities</b>                                                                     | <b>White Knight<br/>Daylight Knight</b><br> | <b>UV Knight</b><br> | <b>Rainbow Knight<br/>(RGBA &amp; RGBW)</b><br>                                                                          |
|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>8bit + DUAL</b>                                                                               | n/a                                                                                                                          | n/a                                                                                                   | <b>#6</b><br><b>6ch</b><br>6 – Control Channel<br>Control < 50%<br>1 – Red<br>2 – Green<br>3 – Blue<br>4 – Amber/White<br>5 – Master Dimmer<br>Control > 50%<br>1 – CCT (2200-10,000K)<br>5 – Master Dimmer |
| <b>8bit NO PWM</b><br><i>Does Not Use PWM to Dim, No Flicker on Cameras But “Steppy” Dimming</i> | <b>#4</b><br><b>1ch</b><br>1 – Intensity                                                                                     | <b>#4</b><br><b>1ch</b><br>1 – Intensity                                                              | <b>#7</b><br><b>4ch</b><br>Intensity<br>1 – Red<br>2 – Green<br>3 – Blue<br>4 – Amber/White                                                                                                                 |


## Power Supply Interface

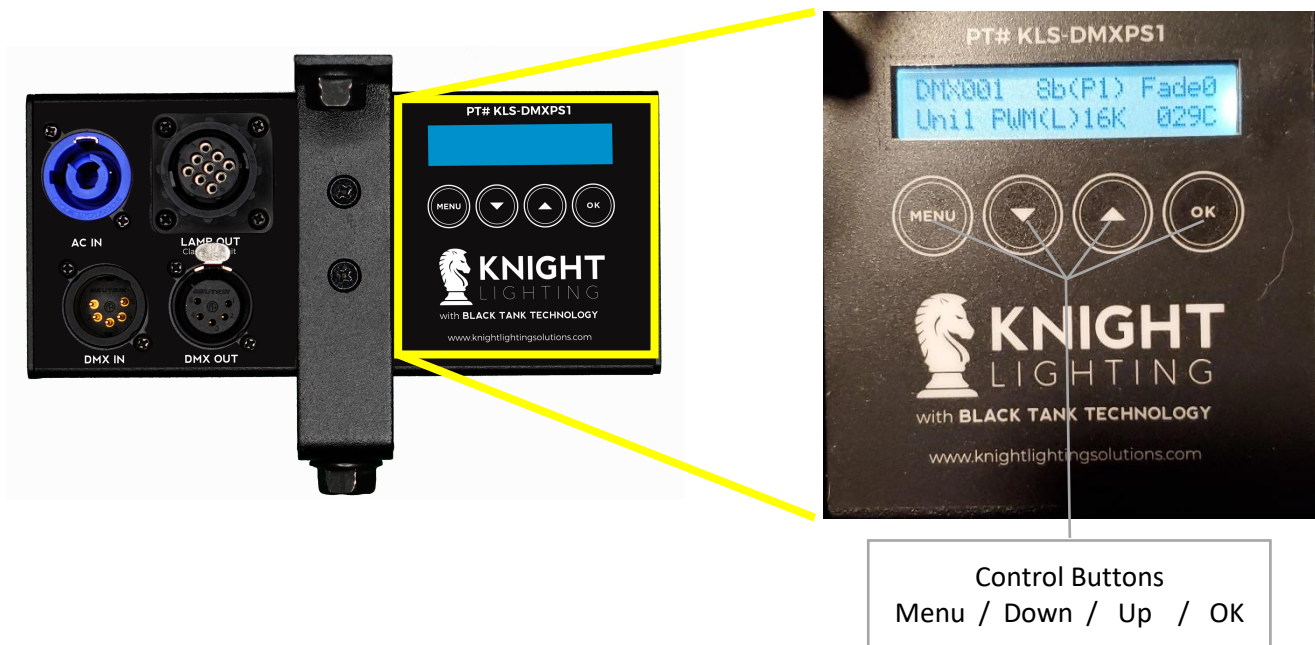

## Main Display Screens

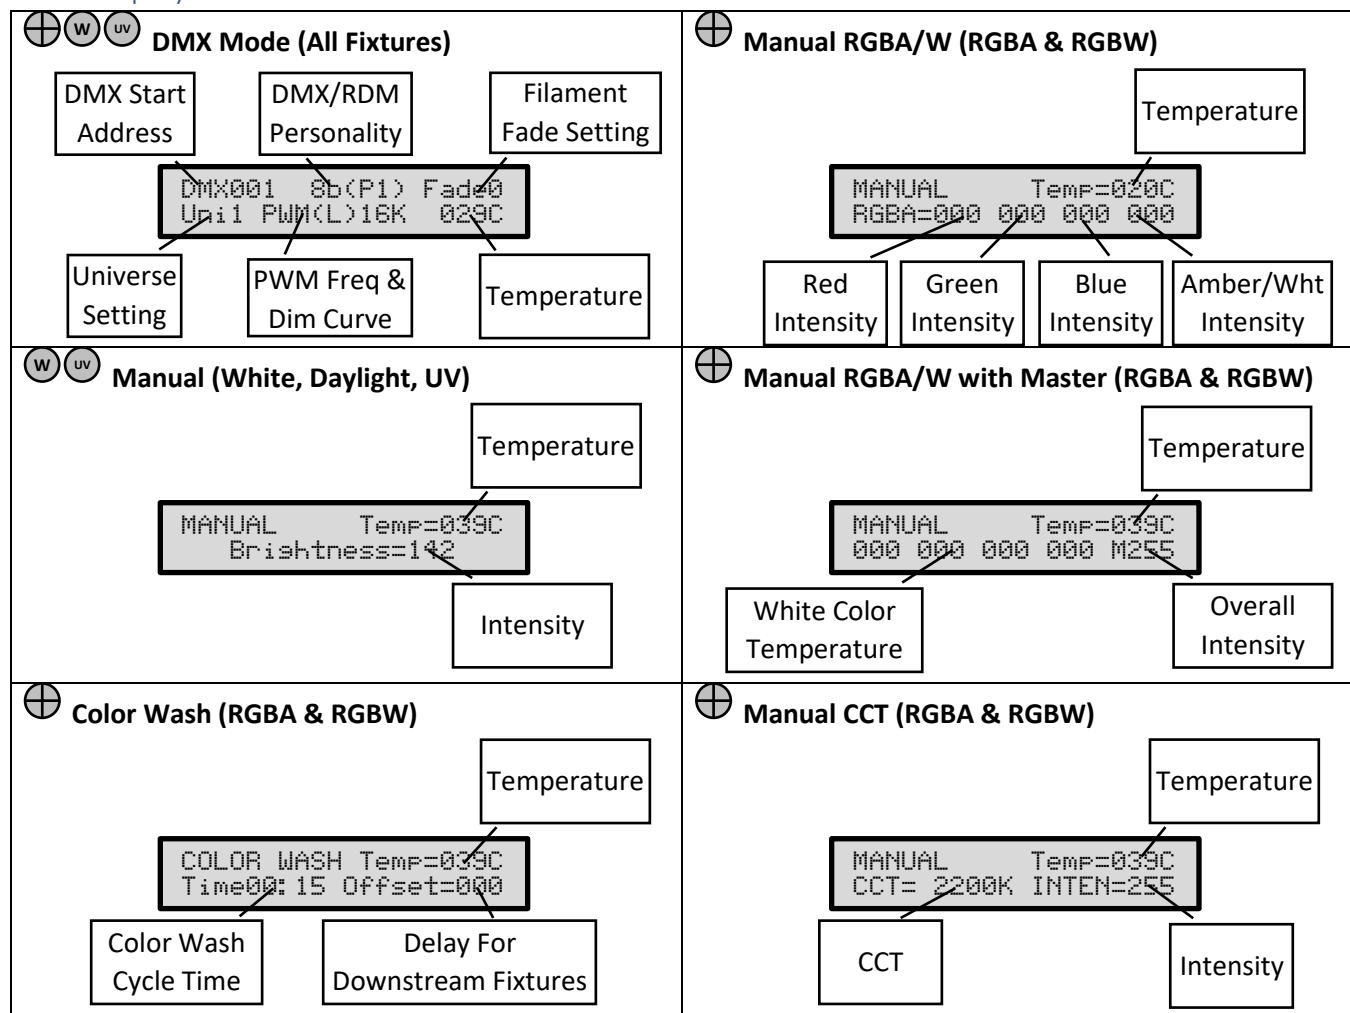

\* References to "Temperature" are alternating measurements of temperature at power supply and head.



## DMX Mode Menu Tree

|                                                                                    |                                                                                                                                                                                                                                                                           |                                           |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| <div>DMX001 8b(P1) Fade0<br/>Uni1 PWM(L)16K 029C</div>                             | <div>Status Display</div>                                                                                                                                                                                                                                                 | <div>Up/Down Cycles Through Options</div> |
| <div>Menu</div> <div>CHANGE DMX ADDRESS?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | <div>OK</div> <div>Change DMX Address</div> <div>CHANGE DMX ADDRESS?<br/>ADDRESS=001</div>                                                                                                                                                                                | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>SET TO UNIVERSE 2?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>   | <div>OK Sets to Universe Shown &amp; Returns</div>                                                                                                                                                                                                                        |                                           |
| <div>Menu</div> <div>CHANGE PERSONALITY?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | <div>OK</div> <div>Change Personality</div> <div>CHANGE PERSONALITY?<br/>P(1)= 8bit LEGACY(4)</div>                                                                                                                                                                       | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE DIMMING CURV?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>OK</div> <div>Change Dimming Curve</div> <div>CHANGE DIMMING CURV?<br/>LUDICROUS</div>                                                                                                                                                                               | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE FILAMNT FADE?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>OK</div> <div>Change Filament Fade</div> <div>CHANGE FILAMNT FADE?<br/>FILAMNT FADE=0 (OFF)</div>                                                                                                                                                                    | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE OPERATE MODE?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>OK</div> <div>Change Operating Mode</div> <div>CHANGE OPERATE MODE?<br/>DMX &lt;OK&gt;=YES</div>                                                                                                                                                                     | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE POWER LED?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>    | <div>The DMX PSU Has An Internal Blue Power LED On The Motherboard That Is Visible Through The Rear Ventilation Slots</div> <div>The <i>Change Power LED Function</i> Offers 4 x Power LED Intensity Settings</div> <div>4 = Brightest (Factory Preset) 0 = LED OFF</div> |                                           |
| <div>Menu</div> <div>FACTORY SETUP?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>       | <div>Not For End Customer Use</div>                                                                                                                                                                                                                                       |                                           |
| <div>Menu</div> <div>Back to Top</div>                                             |                                                                                                                                                                                                                                                                           |                                           |

## Manual Modes Menu Trees

  White Knight, Daylight Knight, UV Knight

|                                                                                    |                                                                                                                                                                                                                                                                    |                                                                      |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| <div>MANUAL Temp=039C<br/>Brightness=142</div>                                     | <div>Status Display</div>                                                                                                                                                                                                                                          | <div>Up/Down Cycles Through Options</div>                            |
| <div>Menu</div> <div>CHANGE BRIGHTNESS?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>   | <div>OK</div> <div>CHANGE WASH TIMER?<br/>Brightness=142</div>                                                                                                                                                                                                     | <div>Change Color Cycle Timer</div> <div>OK Sets &amp; Returns</div> |
| <div>Menu</div> <div>CHANGE OPERATE MODE?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>OK</div> <div>CHANGE OPERATE MODE?<br/>MANUAL &lt;OK&gt;=YES</div>                                                                                                                                                                                            | <div>Change Operating Mode</div> <div>OK Sets &amp; Returns</div>    |
| <div>Menu</div> <div>CHANGE POWER LED?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>    | <div>The DMX PSU Has An Internal Blue Power LED On The Motherboard That Is Visible Through The Rear Ventilation Slots</div> <div>The Change Power LED Function Offers 4 x Power LED Intensity Settings</div> <div>4 = Brightest (Factory Preset) 0 = LED OFF</div> |                                                                      |
| <div>Menu</div> <div>FACTORY SETUP?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>       | <div>Not For End Customer Use</div>                                                                                                                                                                                                                                |                                                                      |
| <div>Menu</div> <div>Back to Top</div>                                             |                                                                                                                                                                                                                                                                    |                                                                      |

|                                                                                    |                                                                                                                                                                                                                                         |                                |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| <div>MANUAL Temp=020C<br/>RGBA=000 000 000 000</div>                               | Status Display                                                                                                                                                                                                                          | Up/Down Cycles Through Options |
| <div>Menu</div> <div>CHANGE RED SETTING?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | <div>Change Red Brightness</div> <div>OK → CHANGE RED SETTING?<br/>RED BRIGHTNESS=000</div> <div>OK Sets &amp; Returns ↗</div>                                                                                                          |                                |
| <div>Menu</div> <div>CHANGE GRN SETTING?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | <div>Change Green Brightness</div> <div>OK → CHANGE GRN SETTING?<br/>GRN BRIGHTNESS=000</div> <div>OK Sets &amp; Returns ↗</div>                                                                                                        |                                |
| <div>Menu</div> <div>CHANGE BLUE SETTING?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>Change Blue Brightness</div> <div>OK → CHANGE BLUE SETTING?<br/>BLUE BRIGHTNESS=000</div> <div>OK Sets &amp; Returns ↗</div>                                                                                                       |                                |
| <div>Menu</div> <div>CHANGE AMBR SETTING?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>Change Amber (White) Brightness</div> <div>OK → CHANGE AMBR SETTING?<br/>AMBR BRIGHTNESS=000</div> <div>OK Sets &amp; Returns ↗</div>                                                                                              |                                |
| <div>Menu</div> <div>TURN ON CCT KELVIN?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | Change to CCT Sub-Mode →                                                                                                                                                                                                                |                                |
| <div>Menu</div> <div>TURN ON MSTR DIMMER?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | Change to Master Dimmer Sub-Mode →                                                                                                                                                                                                      |                                |
| <div>Menu</div> <div>CHANGE OPERATE MODE?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>Change Operating Mode</div> <div>OK → CHANGE OPERATE MODE?<br/>MANUAL &lt;OK&gt;=YES</div> <div>OK Sets &amp; Returns ↗</div>                                                                                                      |                                |
| <div>Menu</div> <div>CHANGE POWER LED?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>    | The DMX PSU Has An Internal Blue Power LED On The Motherboard That Is Visible Through The Rear Ventilation Slots<br>The Change Power LED Function Offers 4 x Power LED Intensity Settings<br>4 = Brightest (Factory Preset) 0 = LED OFF |                                |
| <div>Menu</div> <div>FACTORY SETUP?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>       | Not For End Customer Use →                                                                                                                                                                                                              |                                |
| <div>Menu</div> <div>Back to Top</div>                                             |                                                                                                                                                                                                                                         |                                |



## Master Dimmer Sub-Mode

|                                                                                    |                                                                                                                                                                                                                                                      |                                  |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| <div>MANUAL Temp=039C<br/>000 000 000 000 M255</div>                               | Status Display                                                                                                                                                                                                                                       | Up/Down Cycles Through Options   |
| <div>Menu</div> <div>CHANGE RED SETTING?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | <div>Change Red Brightness</div> <div>OK → CHANGE RED SETTING?<br/>RED BRIGHTNESS=000</div>                                                                                                                                                          | <div>OK Sets &amp; Returns</div> |
| <div>Menu</div> <div>CHANGE GRN SETTING?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | <div>Change Green Brightness</div> <div>OK → CHANGE GRN SETTING?<br/>GRN BRIGHTNESS=000</div>                                                                                                                                                        | <div>OK Sets &amp; Returns</div> |
| <div>Menu</div> <div>CHANGE BLUE SETTING?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>Change Blue Brightness</div> <div>OK → CHANGE BLUE SETTING?<br/>BLUE BRIGHTNESS=000</div>                                                                                                                                                       | <div>OK Sets &amp; Returns</div> |
| <div>Menu</div> <div>CHANGE AMBR SETTING?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>Change Amber (White) Brightness</div> <div>OK → CHANGE AMBR SETTING?<br/>AMBR BRIGHTNESS=000</div>                                                                                                                                              | <div>OK Sets &amp; Returns</div> |
| <div>Menu</div> <div>CHANGE MASTR DIMMER?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>Change Master Brightness</div> <div>OK → CHANGE MASTR DIMMER?<br/>MSTR BRIGHTNESS=000</div>                                                                                                                                                     | <div>OK Sets &amp; Returns</div> |
| <div>Menu</div> <div>TURN ON CCT KELVIN?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | <div>Change to CCT Sub-Mode</div>                                                                                                                                                                                                                    |                                  |
| <div>Menu</div> <div>TURN OFF MSTR DIMMR?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>Change to Normal Sub-Mode</div>                                                                                                                                                                                                                 |                                  |
| <div>Menu</div> <div>CHANGE OPERATE MODE?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>Change Operating Mode</div> <div>OK → CHANGE OPERATE MODE?<br/>MANUAL &lt;OK&gt;=YES</div>                                                                                                                                                      | <div>OK Sets &amp; Returns</div> |
| <div>Menu</div> <div>CHANGE POWER LED?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>    | <div>The DMX PSU Has An Internal Blue Power LED On The Motherboard That Is Visible Through The Rear Ventilation Slots<br/>The Change Power LED Function Offers 4 x Power LED Intensity Settings<br/>4 = Brightest (Factory Preset) 0 = LED OFF</div> |                                  |
| <div>Menu</div> <div>FACTORY SETUP?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>       | <div>Not For End Customer Use</div>                                                                                                                                                                                                                  |                                  |
| <div>Menu</div> <div>Back to Top</div>                                             |                                                                                                                                                                                                                                                      |                                  |

|                                                                                       |                                                                                                                                                                                                                                                      |                                           |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| <div>MANUAL    Temp=039C<br/>CCT= 2200K    INTEN=255</div>                            | <div>Status Display</div>                                                                                                                                                                                                                            | <div>Up/Down Cycles Through Options</div> |
| <div>Menu</div> <div>CHANGE CCT KELVIN?<br/>&lt;MENU&gt;=NO    &lt;OK&gt;=YES</div>   | <div>Change Color Temperature</div> <div>OK → CHANGE CCT KELVIN?<br/>CCT SETTING = 2200K</div>                                                                                                                                                       | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE CCT INTENSTY?<br/>&lt;MENU&gt;=NO    &lt;OK&gt;=YES</div> | <div>Change Brightness</div> <div>OK → CHANGE CCT INTENSTY?<br/>INTENSITY = 255</div>                                                                                                                                                                | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>TURN OFF CCT KELVIN?<br/>&lt;MENU&gt;=NO    &lt;OK&gt;=YES</div> | <div>Change to Normal Sub-Mode</div>                                                                                                                                                                                                                 |                                           |
| <div>Menu</div> <div>CHANGE OPERATE MODE?<br/>&lt;MENU&gt;=NO    &lt;OK&gt;=YES</div> | <div>Change Operating Mode</div> <div>OK → CHANGE OPERATE MODE?<br/>MANUAL    &lt;OK&gt;=YES</div>                                                                                                                                                   | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE POWER LED?<br/>&lt;MENU&gt;=NO    &lt;OK&gt;=YES</div>    | <div>The DMX PSU Has An Internal Blue Power LED On The Motherboard That Is Visible Through The Rear Ventilation Slots<br/>The Change Power LED Function Offers 4 x Power LED Intensity Settings<br/>4 = Brightest (Factory Preset) 0 = LED OFF</div> |                                           |
| <div>Menu</div> <div>FACTORY SETUP?<br/>&lt;MENU&gt;=NO    &lt;OK&gt;=YES</div>       | <div>Not For End Customer Use</div>                                                                                                                                                                                                                  |                                           |
| <div>Menu</div> <div>Back to Top</div>                                                |                                                                                                                                                                                                                                                      |                                           |

 Rainbow Knight (RGBA & RGBW) – Color Wash

|                                                                                    |                                                                                                                                                                                                                                                      |                                           |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| <div>COLOR WASH Temp=039C<br/>Time00:15 Offset=000</div>                           | <div>Status Display</div>                                                                                                                                                                                                                            | <div>Up/Down Cycles Through Options</div> |
| <div>Menu</div> <div>CHANGE WASH TIMER?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>   | <div>OK</div> <div>Change Color Cycle Timer</div> <div>CHANGE WASH TIMER?<br/>WASH TIMER=00:15</div>                                                                                                                                                 | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE WASH OFFSET?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>  | <div>OK</div> <div>Change Offset Between Fixtures</div> <div>CHANGE WASH OFFSET?<br/>WASH OFFSET=000</div>                                                                                                                                           | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE OPERATE MODE?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div> | <div>OK</div> <div>Change Operating Mode</div> <div>CHANGE OPERATE MODE?<br/>MANUAL &lt;OK&gt;=YES</div>                                                                                                                                             | <div>OK Sets &amp; Returns</div>          |
| <div>Menu</div> <div>CHANGE POWER LED?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>    | <div>The DMX PSU Has An Internal Blue Power LED On The Motherboard That Is Visible Through The Rear Ventilation Slots<br/>The Change Power LED Function Offers 4 x Power LED Intensity Settings<br/>4 = Brightest (Factory Preset) 0 = LED OFF</div> |                                           |
| <div>Menu</div> <div>FACTORY SETUP?<br/>&lt;MENU&gt;=NO &lt;OK&gt;=YES</div>       | <div>Not For End Customer Use</div>                                                                                                                                                                                                                  |                                           |
| <div>Menu</div> <div>Back to Top</div>                                             |                                                                                                                                                                                                                                                      |                                           |

[www.knightlightingsolutions.com](http://www.knightlightingsolutions.com)